

SPECIFICATION FOR APPROVAL

Model: MCP0093C0-0080R0SHZ
File Number: JX-YF-S-132.E
File Version: V2017-2

Supreme Power Solutions Co., Ltd.
Room 425, Tailai Business Mansion, No.88, Nongda South Rd,
Haidian District, Beijing, P.R. China
TEL: +86-0755-89486800
FAX: +86-10-61272268
Email: info@spscap.com

Features

- Compact, fully enclosed splash proof design
- Over 1,000,000 duty cycles
- High power density

Applications

- Wind turbine
- Industrial
- Heavy duty machinery
- Energy storage system



Specification

ELECTRICAL

Nominal Capacitance

93 F

Capacitance Tolerance

0% / +20%

Rated Voltage

80 V

Surge Voltage

86.4 V

ESR, DC

13.5 mΩ

Maximum Continuous Current (Δ T=15°C)

100 A

Maximum Continuous Current (Δ T=40°C)

160 A

Maximum Peak Current, 1 sec.

2000 A

Leakage Current

26 mA

Capacitance of Individual Cells

3000 F

Number of Cells

32

MCP0093C0-0080R0SHZ

Environment

Operating Temperature Range

-40°C to +65°C

Storage Temperature Range

-40°C to +70°C

Environment Humidity

≤90%RH

PHYSICAL

Weight

25 kg

Power Terminals

M8/M10

Recommended Torque - Terminal

20/30 Nm

Vibration Specification

IEC 255-21-1

Shock Specification

IEC 255-21-2

Environmental Protection

IP54

MONITORING / CELL VOLTAGE MANAGEMENT

Temperature Monitoring

PT100 Thermistor

Other Function

Mid-point Voltage Measurement

POWER AND ENERGY

Usable Power Density (Pd)

2,275 W/kg

Impedance Match Power Density (Pmax)

4,740 W/kg

Gravimetric Energy Density (Emax)

3.3 Wh/kg

Stored Energy

83.5 Wh

LIFE		MCP0093C0-0080R0SHZ
High Temperature (at Rated Voltage & Maximum operating Temperature)		1,500 hours
Capacitance Change (% decrease from initial measured value)		≤20%
ESR Change (% increase from specified value)		≤100%
Room Temperature (at Rated Voltage at 25°C)		10 years
Capacitance Change (% decrease from initial measured value)		≤20%
ESR Change (% increase from specified value)		≤100%
Cycle Life (Number of cycles)		1,000,000
Capacitance Change (% decrease from initial measured value)		≤20%
ESR Change (% increase from specified value)		≤100%
Shelf Life (25°C, uncharged)		4 years
SAFE		
Factory High-Pot Test		2,500 V DC
THERMAL CHARACTERISTICS		
Typical Thermal Resistance		0.12 °C/W
Typical Thermal Capacitance		21,000 J/°C

Notes

- Surge voltage is non-repetitive. The duration must not exceed 1 second.
- Maximum peak Current is non-repetitive. The duration must not exceed 1 second.
- Formula of maximum peak Current:

$$I_{peak} = \frac{1 / 2CV}{C \times ESR_{DC} + 1}$$

C is rated capacity, V is rated voltage.

- Formula of power and energy

Usable Power Density $P_d = \frac{0.12V^2}{ESR_{DC} \times mass}$

Impedance Match Power Density $P_{max} = \frac{V^2}{4ESR_{DC} \times mass}$

Gravimetric Energy Density $E_{max} = \frac{1 / 2CV^2}{3600 \times mass}$

Stored Energy $E = \frac{1 / 2CV^2}{3600}$

Measuring Method

1) Charge and Discharge procedure

(Figure 1)

- A) Charge the capacitor using constant current I to rated voltage V_0
- B) Keep rated voltage 5 min
- C) Discharge the capacitor using constant current I to half rated voltage, record discharge time T_1 during voltage change from V_1 to V_2
- D) Rest 2-5s, record voltage change ΔV
- E) Discharge it to a very low voltage around 0.01V
- F) $V_1=85\% V_0$ $V_2=50\% V_0$

2) Capacitance

$$C = I \cdot T_1 / (V_1 - V_2)$$

C: Capacitance (F)

I: Constant Discharge Current (A)

T_1 : Discharge Time (S)

$V_1 - V_2$: Voltage Change (V)

3) DC ESR

$$\text{DC ESR} = \Delta V / I$$

DC ESR: DC Equivalent Series Resistance (Ω)

ΔV : Voltage Change (V)

I: Constant Discharge Current (A)

4) AC ESR

Measure AC ESR using LCR meter

Frequency: 1KHz

Voltage: fully discharge




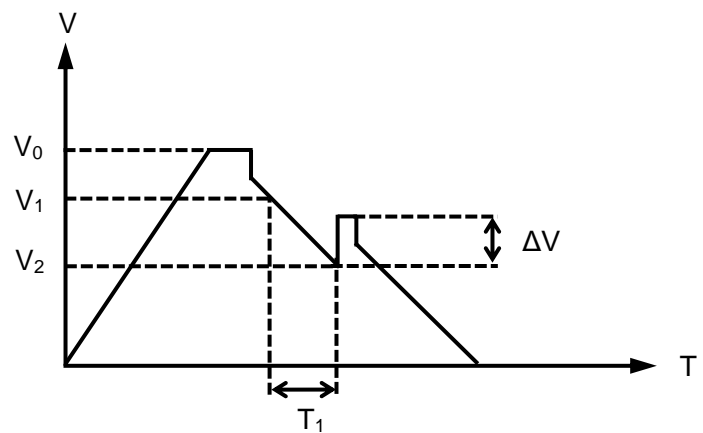


Figure 1

Dimensions

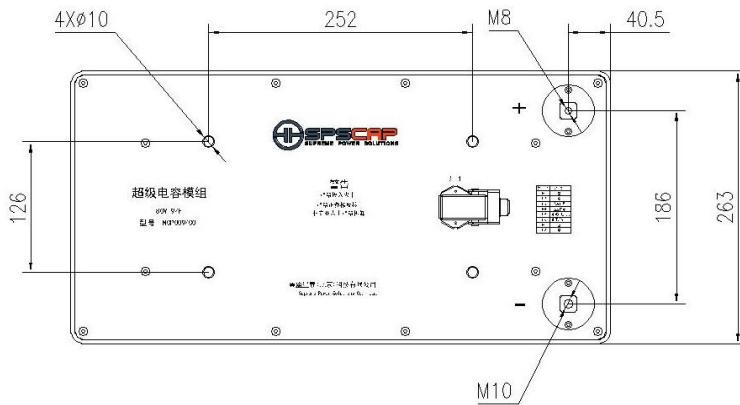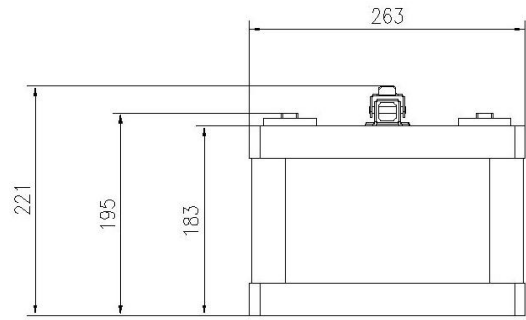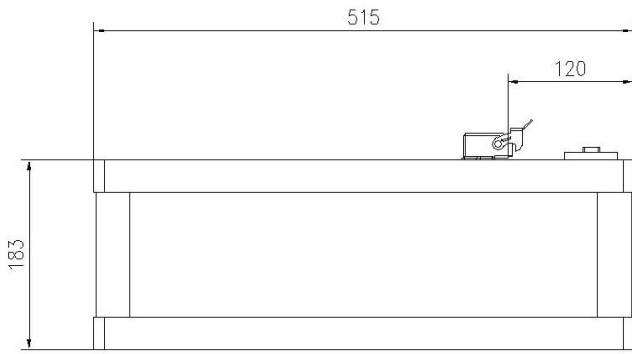

Part Number	Dimension (mm)		
	L (±1mm)	W (±1mm)	H (±1mm)
MCP0093C0-0080R0SHZ	515	263	221