

# SPECIFICATION FOR APPROVAL

**Model:** MCP0300C0-0028R5SHZ  
**File Number:** JX-YF-S-182.E  
**File Version:** V2017-1

Supreme Power Solutions Co., Ltd.  
Room 425, Tailai Business Mansion, No.88, Nongda South Rd,  
Haidian District, Beijing, P.R. China  
TEL: +86-0755-89486800  
FAX: +86-10-61272268  
Email: info@spscap.com

## Features

- Over 1,000,000 duty cycles
- High power density
- Low ESR

## Applications

- Heavy duty vehicles engine start

## Specification



### ELECTRICAL

MCP0300C0-0028R5SHZ

Nominal Capacitance	300 F
Capacitance Tolerance	0% / +20%
Cold Cranking Amps	1100 CCA
Peak Power	50.7 kW
Input voltage (B+ terminal)	18 V-30 V
Output voltage	28.5 V
Current draw (on batteries)	25 A max. (from battery when charging) < 10 mA

### Environment


Operating Temperature Range	-40°C to +65°C
-----------------------------	----------------

### PHYSICAL

Weight	13.3 kg
Power Terminals	Battery Pole

<b>LIFE</b>		<b>MCP0300C0-0028R5SHZ</b>
<b>High Temperature</b> (at Rated Voltage & Maximum operating Temperature)		1,500 hours
<b>Capacitance Change</b> (% decrease from initial measured value)		≤20%
<b>ESR Change</b> (% increase from specified value)		≤100%
<b>Room Temperature</b> (at Rated Voltage at 25°C)		10 years
<b>Capacitance Change</b> (% decrease from initial measured value)		≤20%
<b>ESR Change</b> (% increase from specified value)		≤100%
<b>Cycle Life</b> (Number of cycles)		1,000,000
<b>Capacitance Change</b> (% decrease from initial measured value)		≤20%
<b>ESR Change</b> (% increase from specified value)		≤100%
<b>Shelf Life</b> (25°C, uncharged)		4 years
<b>SAFE</b>		
<b>Factory High-Pot Test</b>		500 V DC

## Dimensions

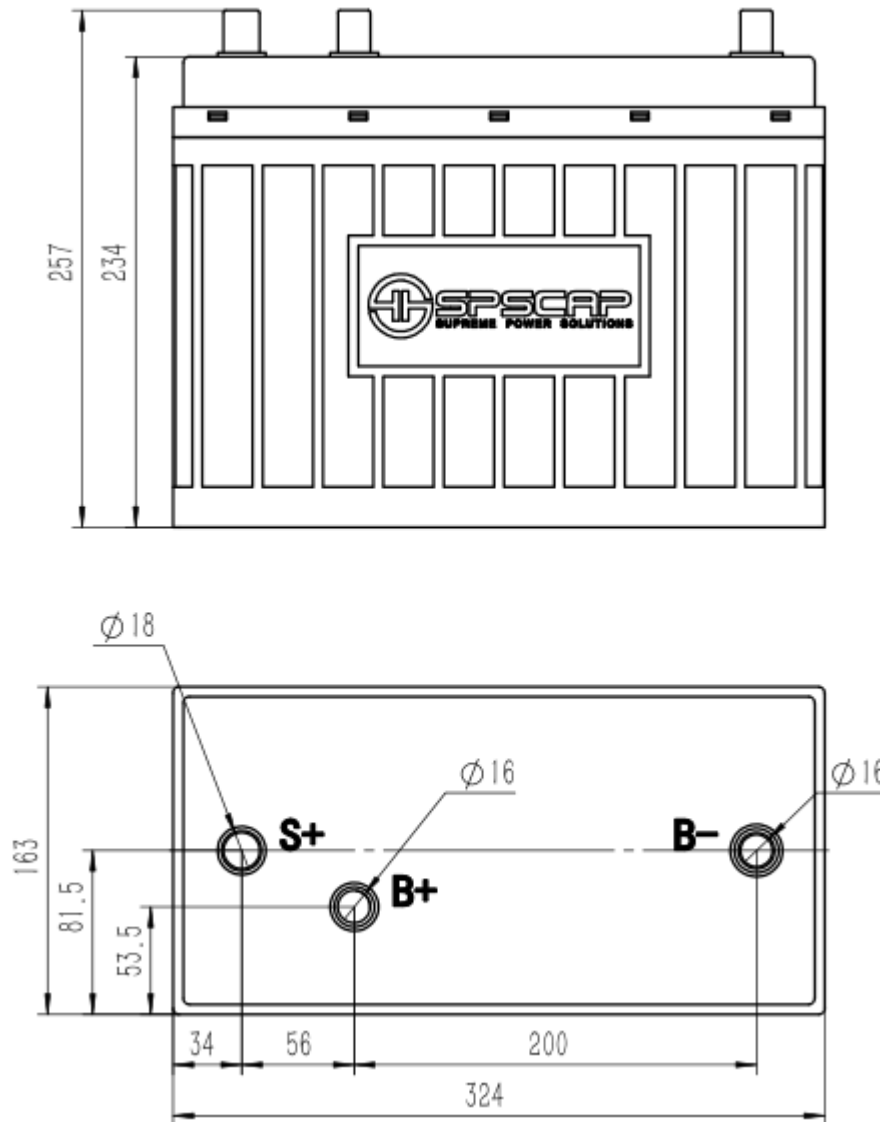

Part Number	Dimension (mm)		
	L ( $\pm 0.5\text{mm}$ )	W ( $\pm 0.5\text{mm}$ )	H ( $\pm 0.5\text{mm}$ )
MCP0300C0-0028R5SHZ	324	163	257