

SPECIFICATION FOR APPROVAL

Model: MCE0060C0-0015R0TBF
File Number: JX-YF-S-154.E
File Version: V2017-1

Supreme Power Solutions Co., Ltd.
Room 425, Tailai Business Mansion, No.88, Nongda South Rd,
Haidian District, Beijing, P.R. China
TEL: +86-0755-89486800
FAX: +86-10-61272268
Email: info@spscap.com

Features

- Over 1,000,000 duty cycles
- High power density
- Low ESR

Applications

- UPS and backup power supply
- Electronic tools
- Solar system
- Energy storage system

Specification



ELECTRICAL	MCE0060C0-0015R0TBF
Nominal Capacitance	60 F
Capacitance Tolerance	0% / +20%
Rated Voltage	15 V
Surge Voltage	15.5 V
ESR, DC	25 mΩ
Maximum Continuous Current (Δ T=15°C)	12 A
Maximum Continuous Current (Δ T=40°C)	20 A
Maximum Peak Current, 1 sec.	230 A
Leakage Current (25°C, after 72h)	0.58 mA
Capacitance of Individual Cells	350 F
Number of Cells	6
Environment	
Operating Temperature Range	-40°C to +65°C
Storage Temperature Range	-40°C to +70°C
Environment Humidity	≤85%RH
PHYSICAL	
Weight	480 g
Power Terminals	Terminal Block
Vibration Specification	IEC 255-21-1
Shock Specification	IEC 255-21-2
FUNCTION	
Cell Voltage Balancing	2.6V~2.65V, hysteresis 0.1V
Voltage Alarm	2.7V~2.75V
POWER AND ENERGY	
Usable Power Density (Pd)	2,250 W/kg
Impedance Match Power Density (Pmax)	4,687 W/kg
Gravimetric Energy Density (Emax)	3.91 Wh/kg
Stored Energy	1.88 Wh

LIFE		MCE0060C0-0015R0TBF
High Temperature (at Rated Voltage & Maximum operating Temperature)		1,500 hours
Capacitance Change (% decrease from initial measured value)		≤20%
ESR Change (% increase from specified value)		≤100%
Room Temperature (at Rated Voltage at 25°C)		10 years
Capacitance Change (% decrease from initial measured value)		≤20%
ESR Change (% increase from specified value)		≤100%
Cycle Life (Number of cycles)		1,000,000
Capacitance Change (% decrease from initial measured value)		≤20%
ESR Change (% increase from specified value)		≤100%
Shelf Life (25°C, uncharged)		4 years
THERMAL CHARACTERISTICS		
Typical Thermal Resistance		4 °C/W
Typical Thermal Capacitance		500 J/°C

Notes

- Surge voltage is non-repetitive. The duration must not exceed 1 second.
- Maximum peak Current is non-repetitive. The duration must not exceed 1 second.
- Formula of maximum peak Current:

$$I_{peak} = \frac{1 / 2CV}{C \times ESR_{DC} + 1}$$

C is rated capacity, V is rated voltage.

- Formula of power and energy

Usable Power Density $P_d = \frac{0.12V^2}{ESR_{DC} \times mass}$

Impedance Match Power Density $P_{max} = \frac{V^2}{4ESR_{DC} \times mass}$

Gravimetric Energy Density $E_{max} = \frac{1 / 2CV^2}{3600 \times mass}$

Stored Energy $E = \frac{1 / 2CV^2}{3600}$

Measuring Method

1) Charge and Discharge procedure

(Figure 1)

- A) Charge the capacitor using constant current I to rated voltage V_0
- B) Keep rated voltage 5 min
- C) Discharge the capacitor using constant current I to half rated voltage, record discharge time T_1 during voltage change from V_1 to V_2
- D) Rest 2-5s, record voltage change ΔV
- E) Discharge it to a very low voltage around 0.01V
- F) $V_1=85\% V_0$ $V_2=50\% V_0$

2) Capacitance

$$C = I \cdot T_1 / (V_1 - V_2)$$

C: Capacitance (F)

I: Constant Discharge Current (A)

T_1 : Discharge Time (S)

$V_1 - V_2$: Voltage Change (V)

3) DC ESR

$$\text{DC ESR} = \Delta V / I$$

DC ESR: DC Equivalent Series Resistance (Ω)

ΔV : Voltage Change (V)

I: Constant Discharge Current (A)

4) AC ESR

Measure AC ESR using LCR meter

Frequency: 1KHz

Voltage: fully discharge


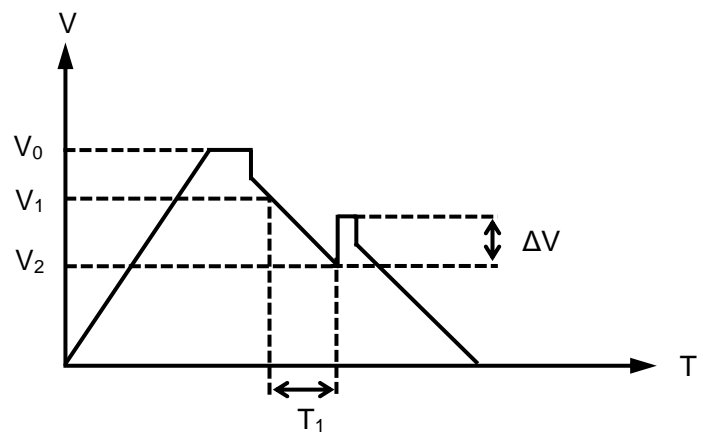


Figure 1

Dimensions

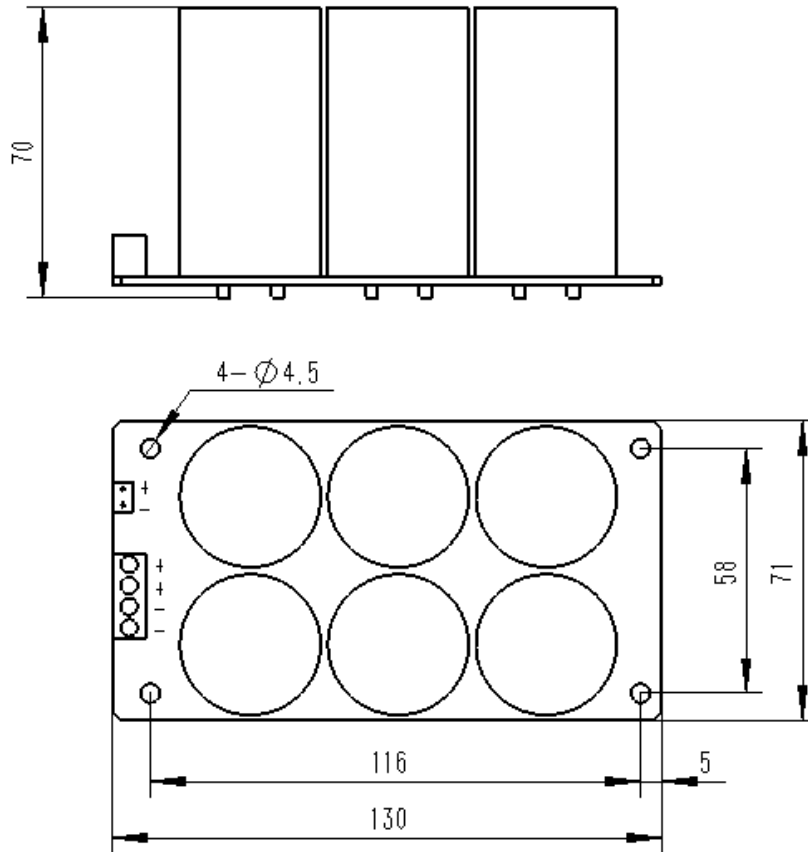

Part Number	Dimension (mm)		
	L (±1mm)	W (±1mm)	H (±1mm)
MCE0060C0-0015R0TBF	130	71	70